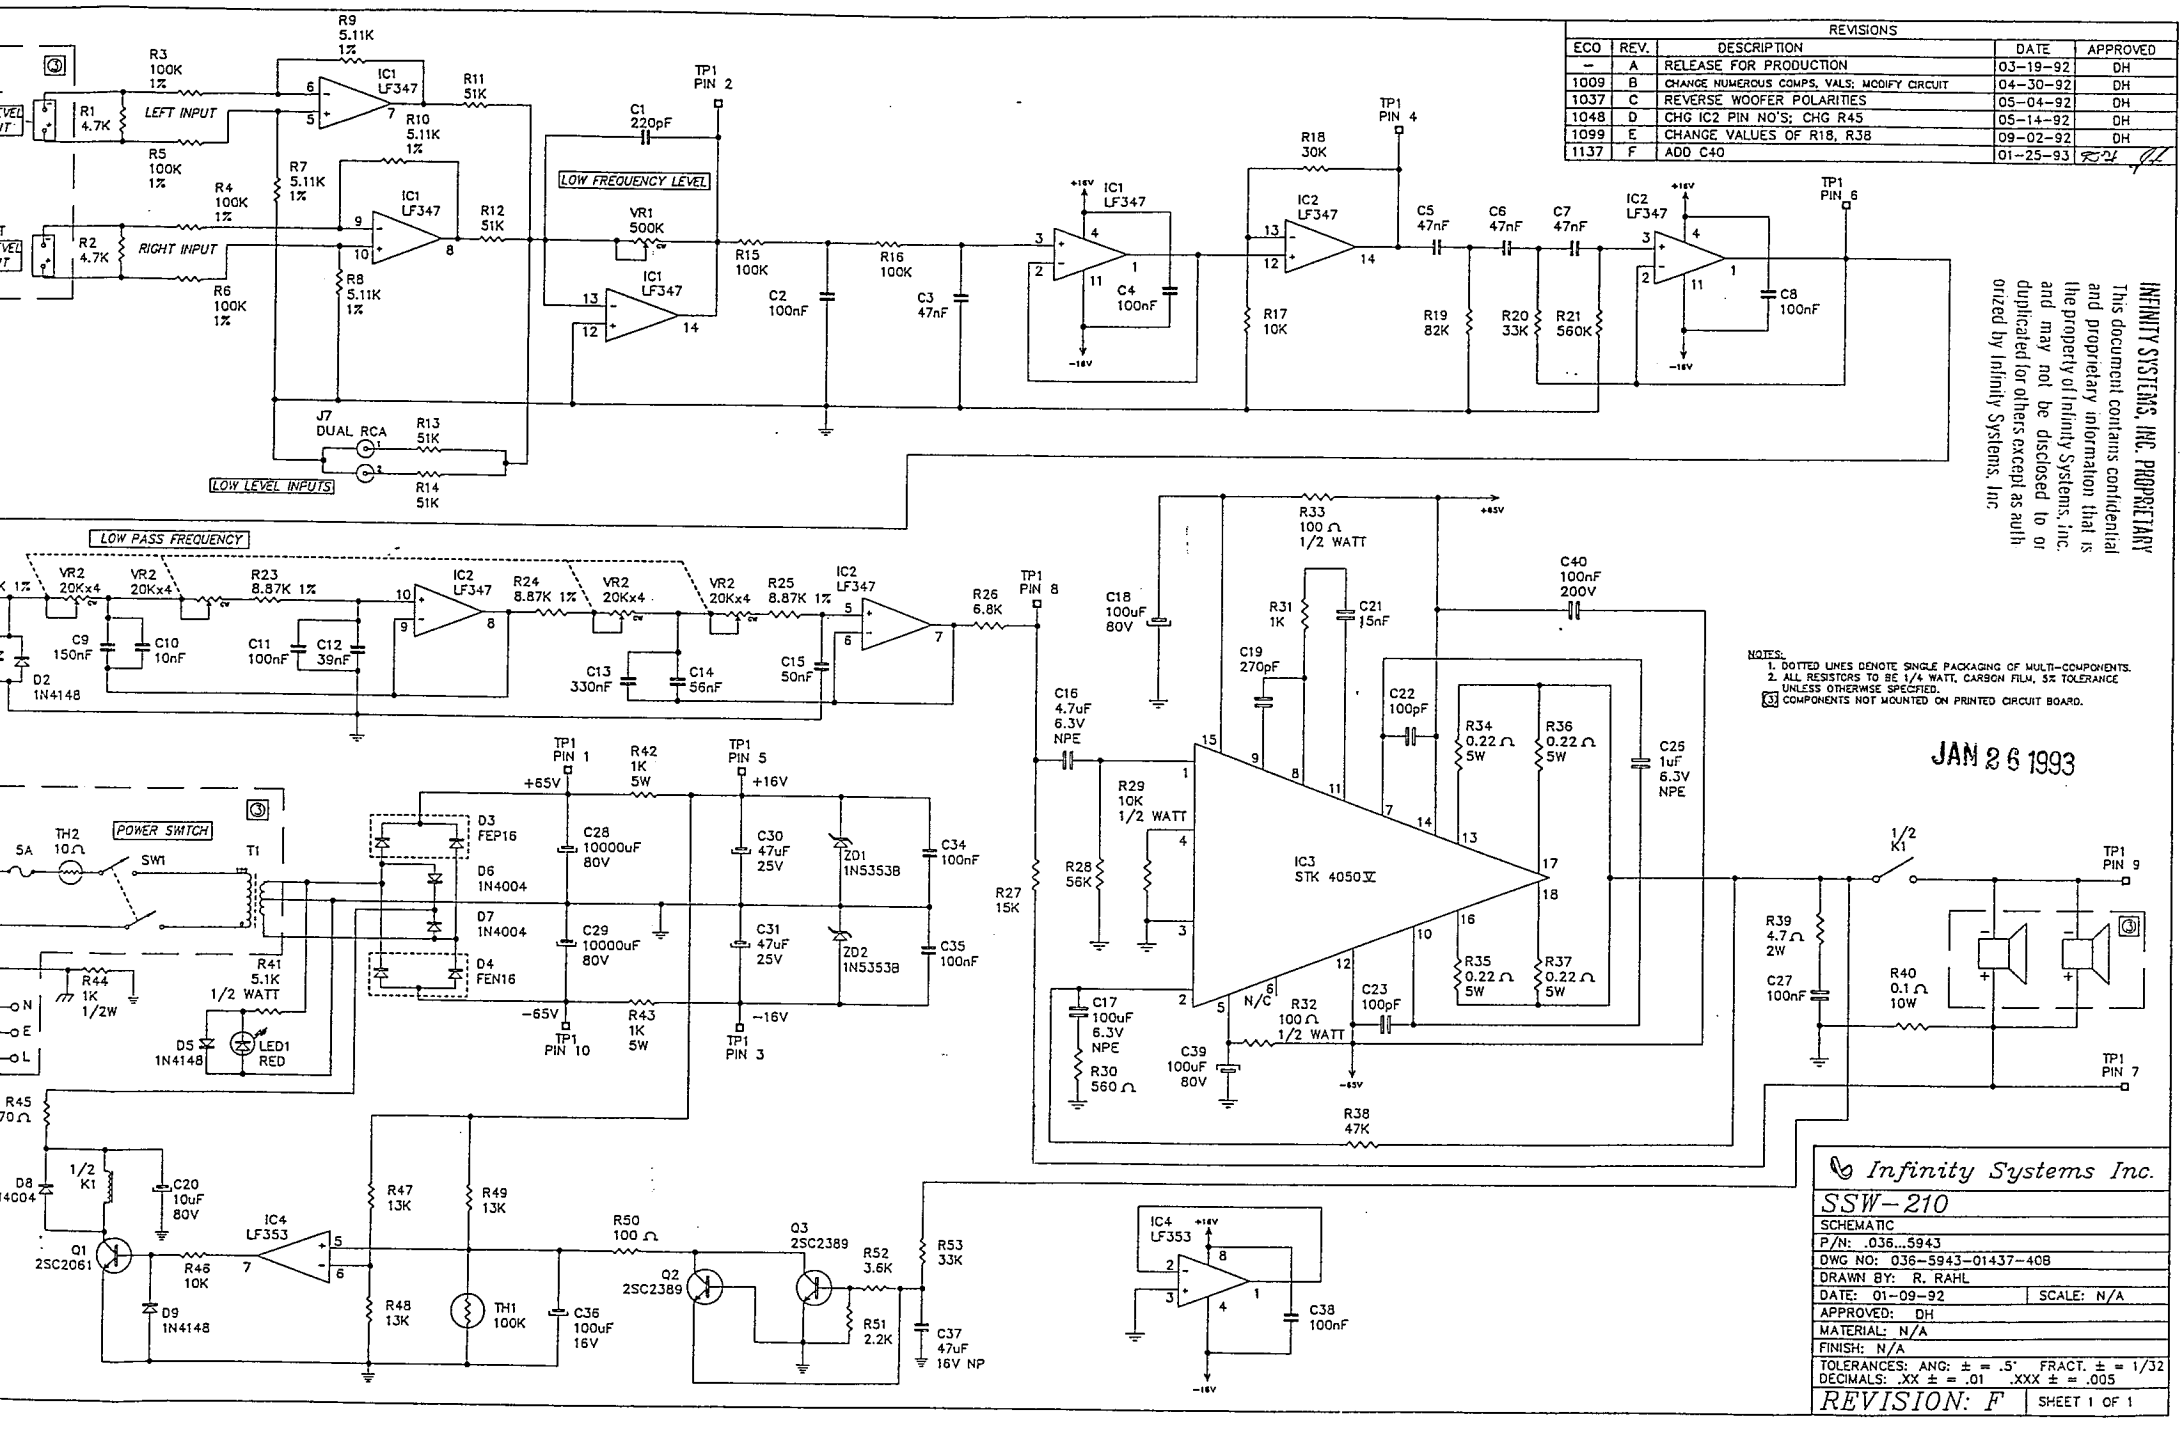
REVISIONS
ECO | REV. | DESCRIPTION | DATE | APPROVED
– | A | RELEASE FOR PRODUCTION | 03-19-92 | DH
1009 | B | CHANGE NUMEROUS COMPS, VALS; MODIFY CIRCUIT | 04-30-92 | DH
1037 | C | REVERSE WOOFER POLARITIES | 05-04-92 | DH
1048 | D | CHG IC2 PIN NO'S; CHG R45 | 05-14-92 | DH
1099 | E | CHANGE VALUES OF R18, R38 | 09-02-92 | DH
1137 | F | ADD C40 | 01-25-93 | DH
INFINITY SYSTEMS, INC. PROPRIETARY
This document contains confidential and proprietary information that is the property of Infinity Systems, inc. and may not be disclosed to or duplicated for others except as authorized by Infinity Systems, Inc.
LOW PASS FREQUENCY
LOW FREQUENCY LEVEL
LOW LEVEL INPUTS
LEFT INPUT
RIGHT INPUT
POWER SWITCH
NOTES:
1. DOTTED LINES DENOTE SINGLE PACKAGING OF MULTI-COMPONENTS.
2. ALL RESISTORS TO BE 1/4 WATT, CARBON FILM, 5% TOLERANCE UNLESS OTHERWISE SPECIFIED.
3. COMPONENTS NOT MOUNTED ON PRINTED CIRCUIT BOARD.
JAN 26 1993
Infinity Systems Inc.
SSW-210
SCHEMATIC
P/N: .036...5943
DWG NO: 036-5943-01437-408
DRAWN BY: R. RAHL
DATE: 01-09-92
SCALE: N/A
APPROVED: DH
MATERIAL: N/A
FINISH: N/A
TOLERANCES: ANG: ± = .5' FRACT. ± = 1/32
DECIMALS: .XX ± = .01 .XXX ± = .005
REVISION: F
SHEET 1 OF 1

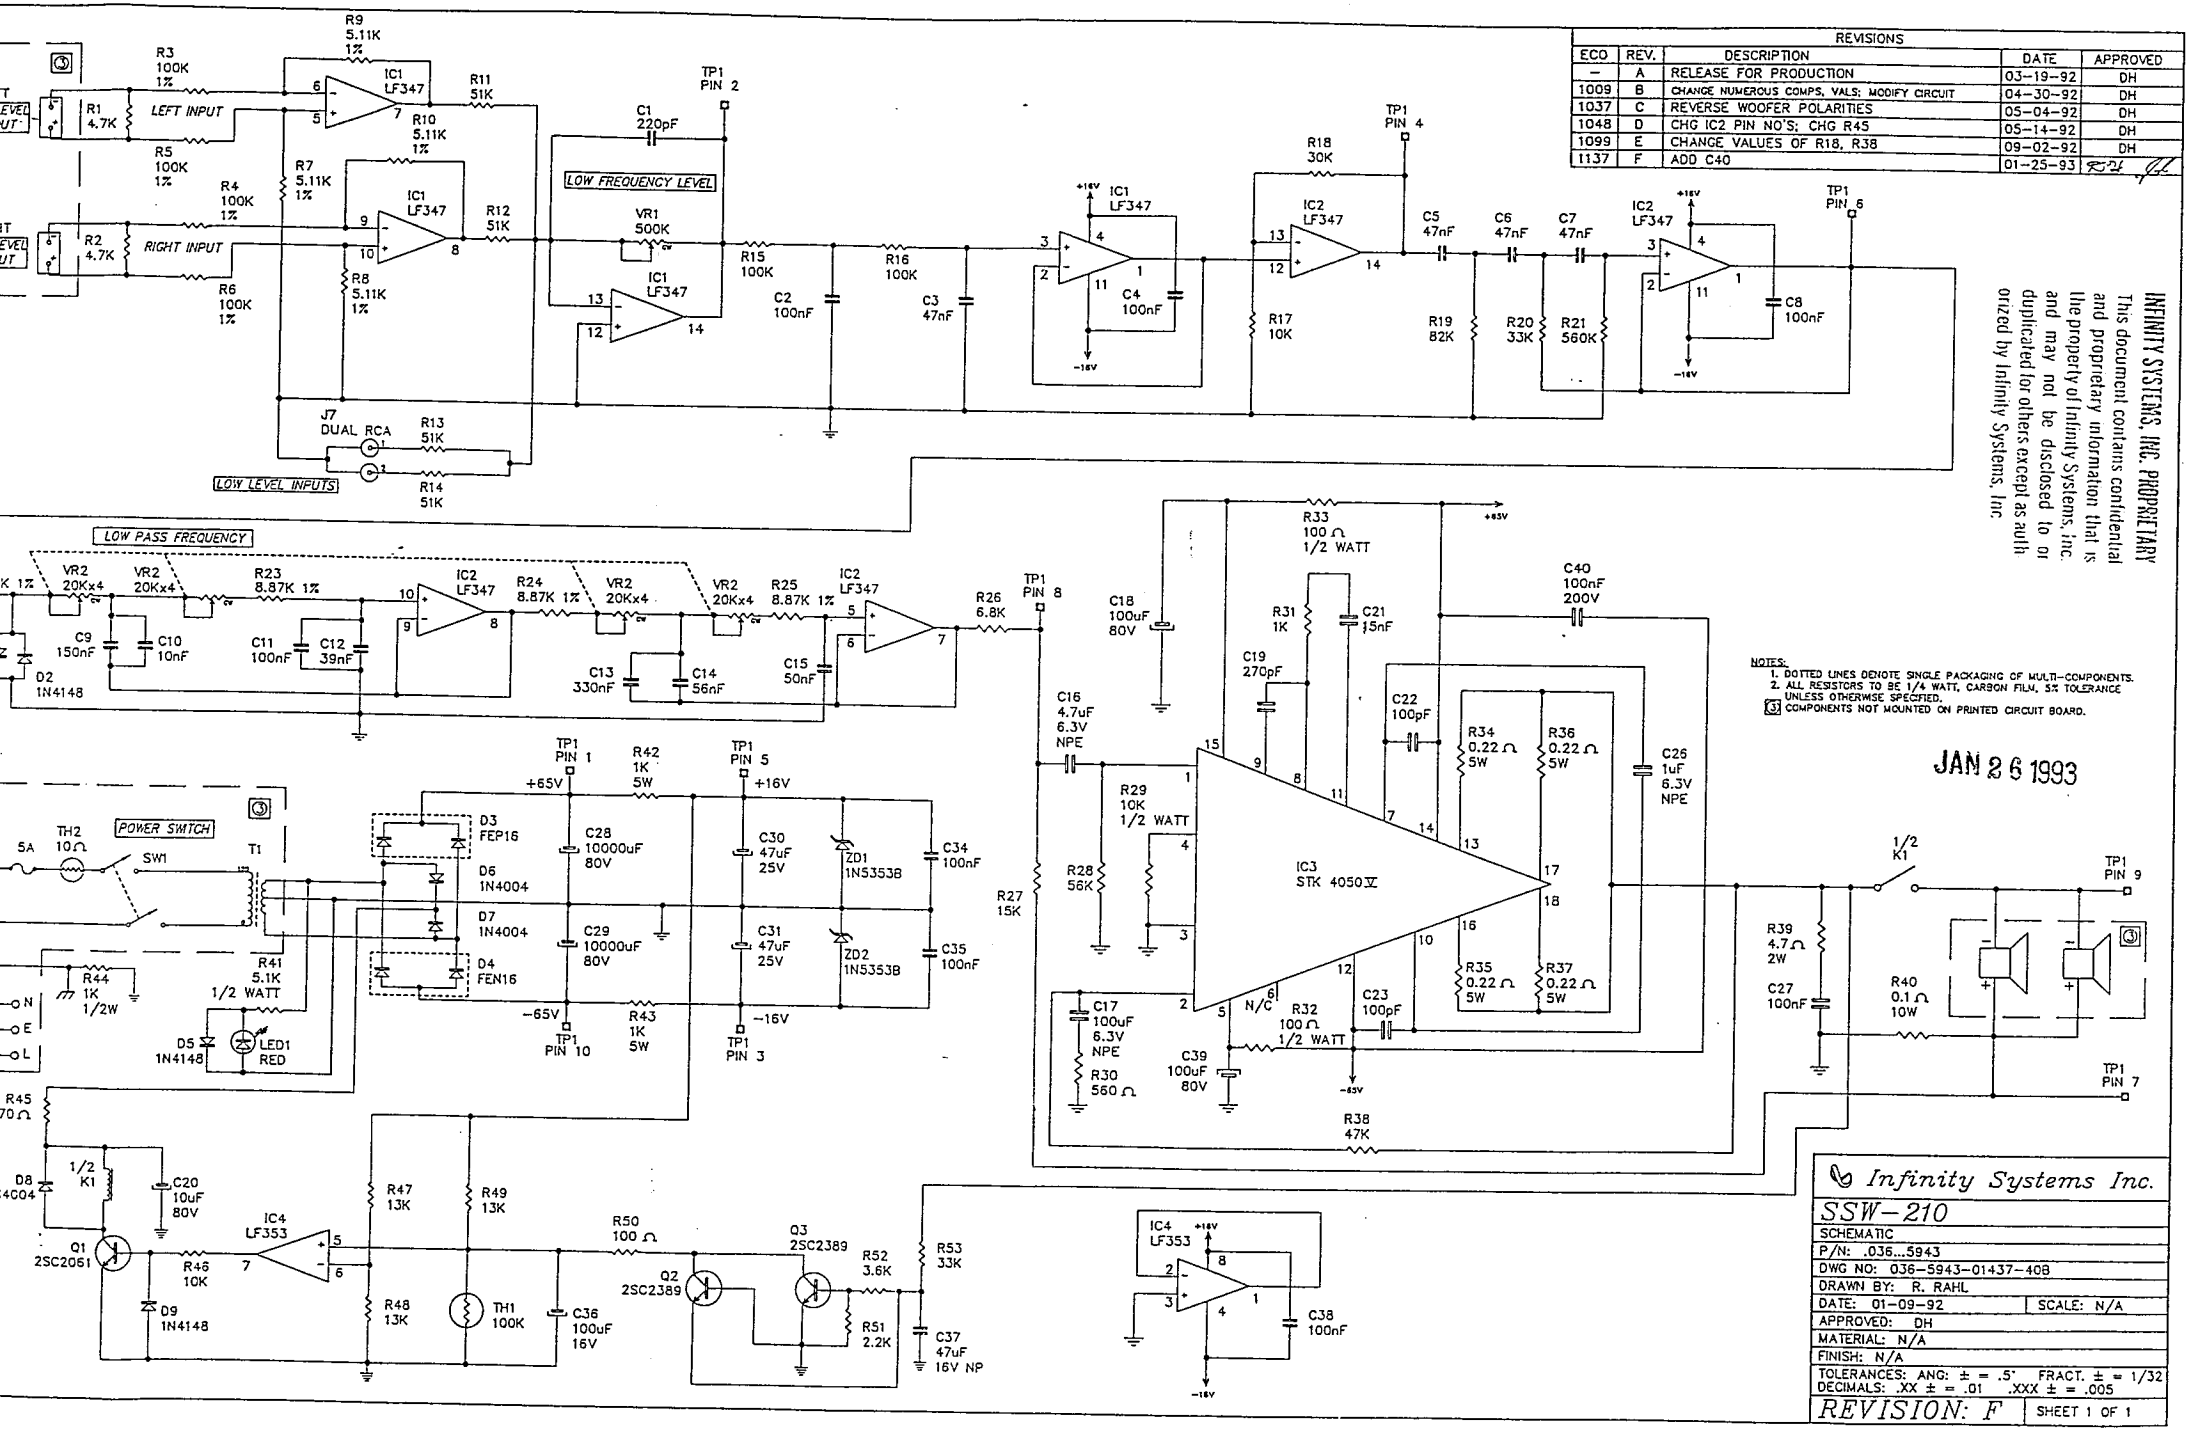

REVISIONS				
ECO	REV.	DESCRIPTION	DATE	APPROVED
—	A	RELEASE FOR PRODUCTION	03-19-92	DH
1009	B	CHANGE NUMEROUS COMPS, VALS; MODIFY CIRCUIT	04-30-92	DH
1037	C	REVERSE WOOFER POLARITIES	05-04-92	DH
1048	D	CHG IC2 PIN NO'S; CHG R45	05-14-92	DH
1099	E	CHANGE VALUES OF R18, R38	09-02-92	DH
1137	F	ADD C40	01-25-93	DH

INFINITY SYSTEMS, INC. PROPRIETARY
This document contains confidential and proprietary information that is the property of Infinity Systems, Inc. and may not be disclosed to or duplicated for others except as authorized by Infinity Systems, Inc.

NOTES:
1. DOTTED LINES DENOTE SINGLE PACKAGING OF MULTI-COMPONENTS.
2. ALL RESISTORS TO BE 1/4 WATT, CARBON FILM, 5% TOLERANCE UNLESS OTHERWISE SPECIFIED.
3. COMPONENTS NOT MOUNTED ON PRINTED CIRCUIT BOARD.

JAN 26 1993

Infinity Systems Inc.

SSW-210	
SCHEMATIC	
P/N: .036...5943	
DWG NO: 036-5943-01437-408	
DRAWN BY: R. RAHL	
DATE: 01-09-92	SCALE: N/A
APPROVED: DH	
MATERIAL: N/A	
FINISH: N/A	
TOLERANCES: ANG: ± = .5° FRACT. ± = 1/32 DECIMALS: .XX ± = .01 .XXX ± = .005	
REVISION: F	SHEET 1 OF 1

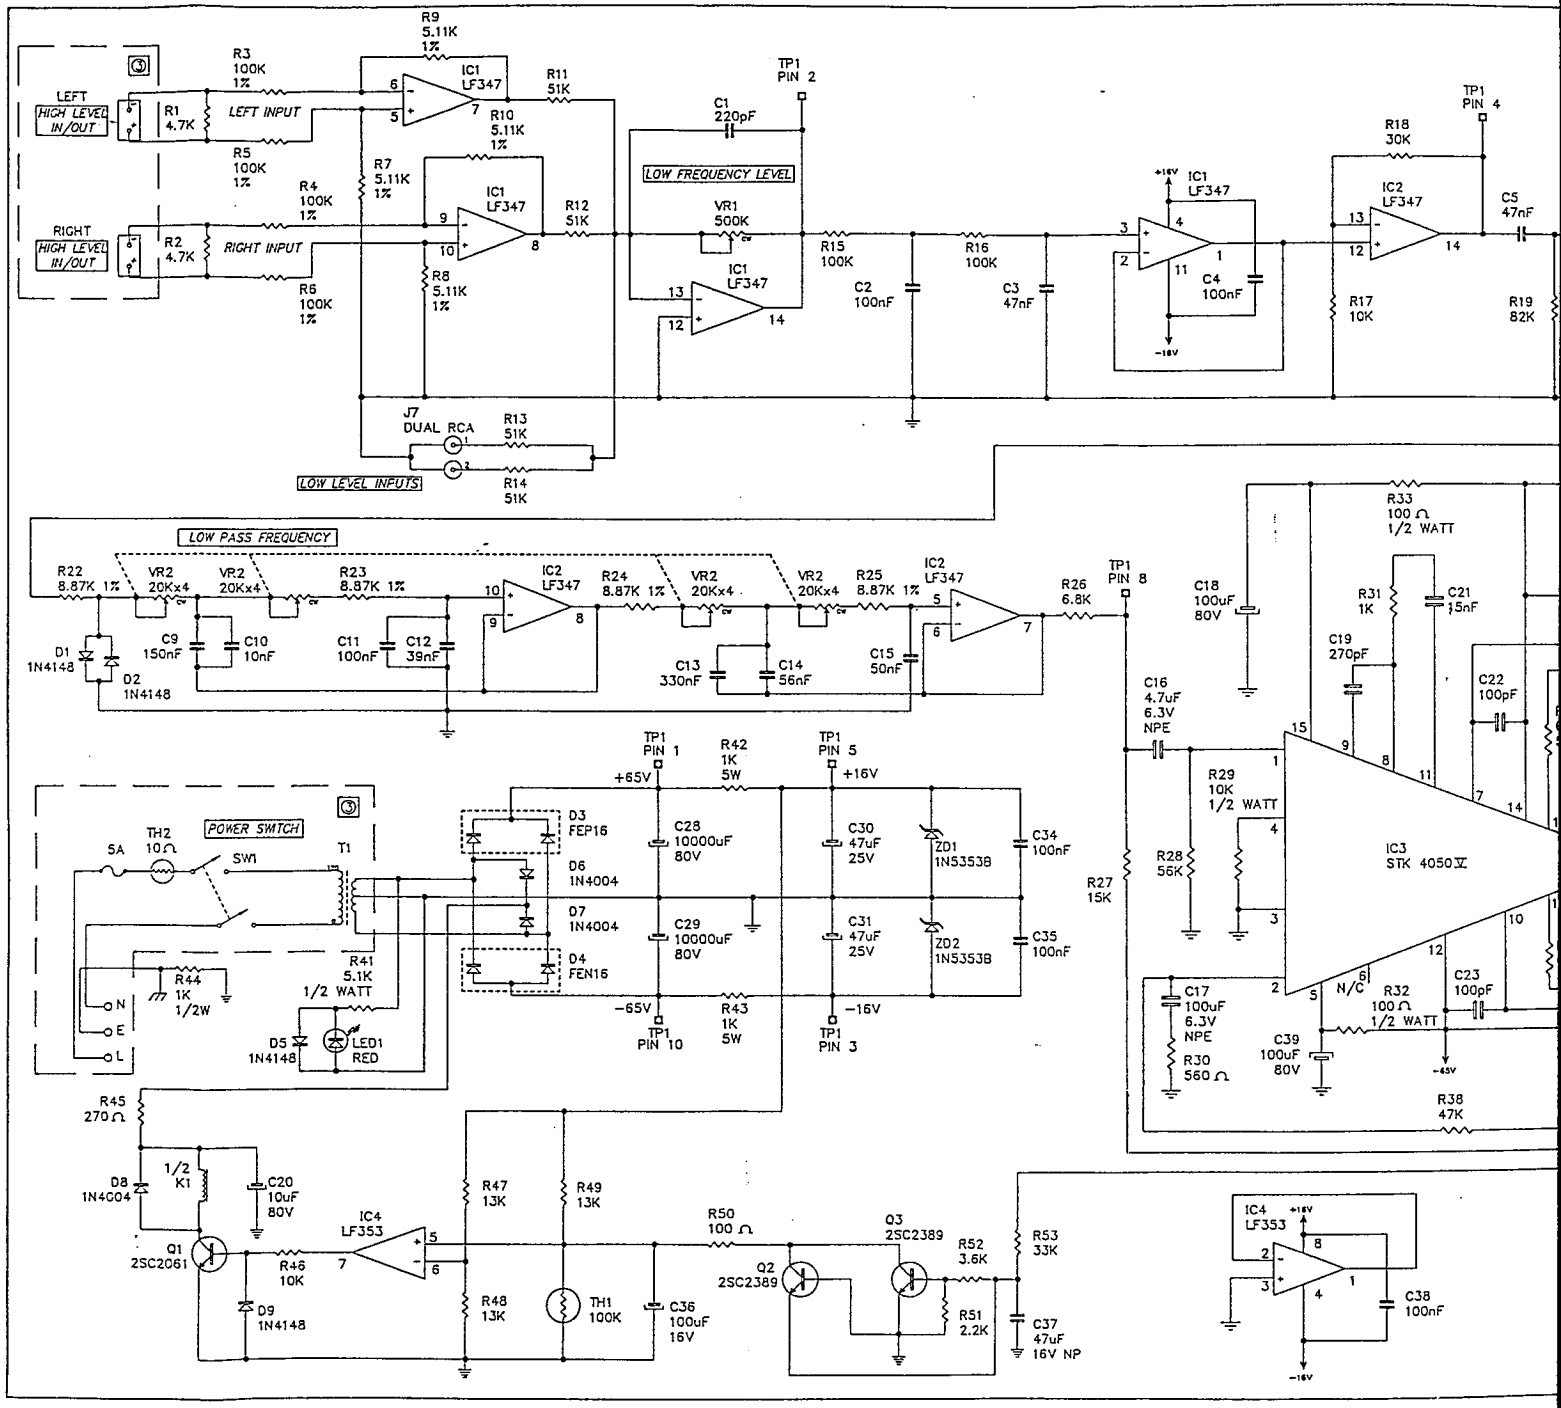
LEFT
HIGH LEVEL IN/OUT
LEFT INPUT
RIGHT
HIGH LEVEL IN/OUT
RIGHT INPUT
LOW LEVEL INPUTS
J7 DUAL RCA
LOW FREQUENCY LEVEL
LOW PASS FREQUENCY
POWER SWITCH
IC1 LF347
IC2 LF347
IC3 STK 4050Ⅴ
IC4 LF353
TP1 PIN 1
TP1 PIN 2
TP1 PIN 3
TP1 PIN 4
TP1 PIN 5
TP1 PIN 8
TP1 PIN 10
+65V
+16V
-65V
-16V
R1 4.7K
R2 4.7K
R3 100K 1%
R4 100K 1%
R5 100K 1%
R6 100K 1%
R7 5.11K 1%
R8 5.11K 1%
R9 5.11K 1%
R10 5.11K 1%
R11 51K
R12 51K
R13 51K
R14 51K
R15 100K
R16 100K
R17 10K
R18 30K
R19 82K
C1 220pF
C2 100nF
C3 47nF
C4 100nF
C5 47nF
VR1 500K
R22 8.87K 1%
R23 8.87K 1%
R24 8.87K 1%
R25 8.87K 1%
R26 6.8K
VR2 20Kx4
C9 150nF
C10 10nF
C11 100nF
C12 39nF
C13 330nF
C14 56nF
C15 50nF
D1 1N4148
D2 1N4148
R27 15K
R28 56K
R29 10K 1/2 WATT
R30 560Ω
R31 1K
R32 100Ω 1/2 WATT
R33 100Ω 1/2 WATT
R38 47K
C16 4.7uF 6.3V NPE
C17 100uF 6.3V NPE
C18 100uF 80V
C19 270pF
C21 15nF
C22 100pF
C23 100pF
C39 100uF 80V
TH2 10Ω
5A
SW1
T1
N
E
L
R41 5.1K 1/2 WATT
R42 1K 5W
R43 1K 5W
R44 1K 1/2W
D3 FEP16
D4 FEN16
D5 1N4148
D6 1N4004
D7 1N4004
LED1 RED
C28 10000uF 80V
C29 10000uF 80V
C30 47uF 25V
C31 47uF 25V
C34 100nF
C35 100nF
ZD1 1N5353B
ZD2 1N5353B
R45 270Ω
D8 1N4004
1/2 K1
C20 10uF 80V
Q1 2SC2061
R46 10K
D9 1N4148
R47 13K
R48 13K
R49 13K
TH1 100K
C36 100uF 16V
R50 100Ω
Q2 2SC2389
Q3 2SC2389
R51 2.2K
R52 3.6K
R53 33K
C37 47uF 16V NP
C38 100nF
N/C